

# PROK

## PROK POLYURETHANE DISC ROLLER

### TECHNICAL SPECIFICATION

PROK Polyurethane disc rollers are used in installations where there is significant carry back on the return side of a conveyor due to their very high abrasion resistance and assistance provided to belt cleaning.

Any flat return or 2 roll vee return can be fitted with disc return rollers.



PROK polyurethane disc return rollers can be expected to yield a minimum life increase in the range of 100-300% over steel in areas of high wear (typically head/tail ends, shuttle/take-up areas and convex curves).

#### KEY PROPERTIES OF POLYURETHANE DISCS

- **Premium grade polyurethane** with market leading physical properties including optimum hardness leading to lower rolling resistances (especially when compared with poly-ester based compounds) and higher performance across many varied applications
- **Proven quality and performance** with some PROK installations in for greater than 15 years of service in some of the toughest environments
- **Unaffected by high humidity and high temperatures** as poly-ether based compounds with high hydrolysis resistance last much longer than a poly-ester based compounds. Reduction in tensile strength over days of operation for poly-ester and poly-ether based compounds is shown in the graph below. While the poly-ester based compound


degrades in tensile strength from 55 MPa to close to 0 MPa over 50 days the poly-ether based compound is only reduced to 64% of its initial tensile strength over the same time period of 50 days.

- **The greater the hardness of the polyurethane compound the greater the hydrolytic stability.**

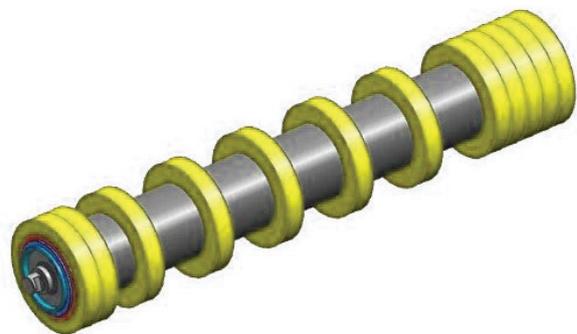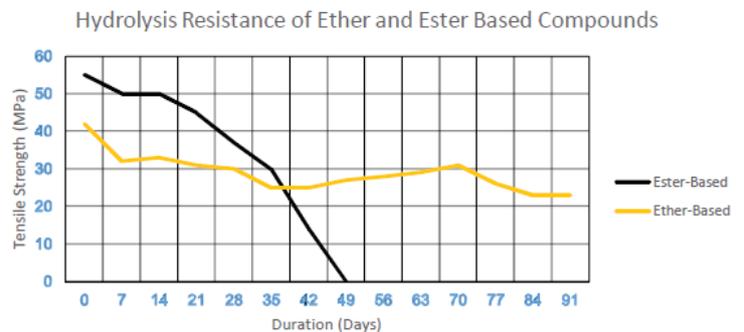

## TESTING RESULTS

A R&D National Bureau of Standards (NBS) test to ASTM D1630 standard was conducted to test the standard polyurethane, enhanced polyurethane and mild steel materials. The PROK standard polyurethane roller wore 4.5 times slower than a standard steel shell and the enhanced polyurethane wore 8.5 times slower than a standard steel shell. The ASTM D1630 test comprised of a drum with grit being rotated and the wear of the sample material monitored. Three samples of the same material were tested in different positions with the weight of the arm, number and speed of the drum the same. In the bar graph, mild steel, standard polyurethane and enhanced polyurethane are plotted showing relative abrasion resistance.

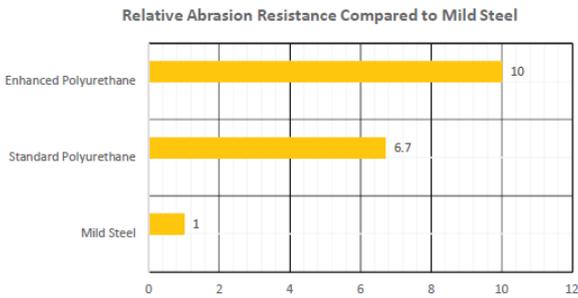

## CASE STUDIES

Coal Mine Studies have been conducted on conveyors head ends to address the significant amount of carry back causing significant wear on the plain steel rolls and reducing considerably the operating life of the rollers. With the Poly Disc Vee Return Rollers installed the carry back on these rollers was shown to be considerably reduced in comparison.



Carry back before Poly Disc Rollers



Carry back after Poly Disc Rollers installed

## MATERIAL DATA

Property	Nominal Value	Standard
Tensile Strength	38 MPa	ASTM D412
Elongation	460%	ASTM D412
Hardness	95 ± 3 Shore A	ASTM DD2240

## AVAILABLE DIAMETERS & BEARING SIZES

BRG	127	152	178
6205	✓		
6307		✓	✓
6308		✓	✓

### PROBLEM

Excessive noise generated from rollers in operation causing noise pollution

### RESULT

Disturbance to surrounding environment and worker wellbeing

### PROK SOLUTION

Low noise aluminium composite roller alternative

FOR MORE INFORMATION

1800 PROKCC | [WWW.PROKCC.COM](http://WWW.PROKCC.COM) |



FOLLOW US

**PROK ASIA PACIFIC**  
**PROK CONVEYOR COMPONENTS PTY LTD**  
 WA - PERTH  
 P.O BOX 731, MORLEY WA 6943  
 285 COLLIER ROAD, BAYSWATER WA 6053  
 P: +61 8 9347 8500  
 F: +61 8 9347 8600  
 E: CONVEYORS.AU@PROKCC.COM

**PROK NORTH AMERICA**  
**PROK CONVEYOR COMPONENTS PTY LTD**  
 8661 - 201ST ST, SUITE 283 LANGLEY, BC  
 CANADA V2Y 0G9  
 P: +1 604 376 8997  
 E: INFO@PROKCC.COM

**QLD - MACKAY**  
 18 DAVID MUIR STREET, SLADE POINT QLD 4740  
 E: CONVEYORS.AU@PROKCC.COM

**NSW - THORNTON**  
 58 BONVILLE AVENUE, THORNTON NSW 2322  
 E: CONVEYORS.AU@PROKCC.COM

